

Technical Data Sheet



HILITE

An ISO/TS 16949 : 2009, ISO 14001:2004, OHSAS 18001 : 2007 Certified Company

HILITE AFM 750 CF NON ASBESTOS GASKET JOINTING SHEET



Applications:

It has excellent resistance to steam and strong alkaline media. It is widely used in the chemical and petrochemical industries. CF exhibits good sealing and torque retention properties. It is specifically designed to satisfy the growing demand for numerous aggressive chemicals used by industry today. CF can also be used for sealing oils, fuels, gases, freons, and general application in paper & pulp industry for application in pipelines, radiators, boilers and many other instances of flanged joints.

General data:

Material Composition (Type of fibres)

Aramid Fibre, Carbon Fibre

Binders

NBR

OPERATING CONDITION

Max. Peak Temp

400°C

Max. Continuous Temp

300°C

Max. Continuous Temp. with steam

280°C

Max. Operating Pressure


150 Kg/cm²

Physical Properties:

The following Information applies to material thickness 2.0 mm.

S.NO.	PROPERTIES	TEST METHOD	UNIT	SPECIFIED VALUE
1.	DENSITY		gm/cm ³	1.70 - 2.00
2.	TENSILE STRENGTH			
	(a) ACC to ASTM F152(ACROSS GRAIN)		N/mm ²	≥ 8
	(b) ACC to DIN52910 (ACROSS GRAIN)		N/mm ²	-
3.	COMPRESSIBILITY	ASTM F36J	%	5 – 15
4.	RECOVERY	ASTM F36J	%	≥ 50
5.	FLUID ABSORPTION	ASTM F 146		
	(a) IN ASTM OIL NO. 3			
	INCREASE IN MASS		%	≤ 10
	INCREASE IN THICKNESS		%	≤ 8
	(b) IN FUEL B	ASTM F 146		
	INCREASE IN MASS		%	≤ 10
	INCREASE IN THICKNESS		%	≤ 7
	(c) IN WATER/ANTIFREEZE	ASTM F 146		
	INCREASE IN MASS		%	≤ 10
	INCREASE IN THICKNESS		%	≤ 7
6.	IGNITION LOSS	DIN 52911	%	≤ 30
7.	SEALABILITY AGAINST Nitrogen	DIN 3535	cm ³ /min.	≤ 0.5
8.	STRESS RESISTANCE			
	16h 300°C	DIN 52913	N/mm ²	~ 20
	16h 175°C	DIN 52913	N/mm ²	~ 30

Standard Sheet Size		1500x2000 mm, 1500x4000mm, 1500x1500mm 1500x4500 mm, 1500x3000mm, 2000x3000 mm
Thickness		0.25 mm to 6.00 mm (For Non-Metallic Range) 0.80 mm to 6.00 mm (For Metallic Range)
Tolerance	Thickness	< 1mm = ± 0.10 mm > 1mm = $\pm 10\%$
	Length	± 50 mm
	Width	± 50 mm

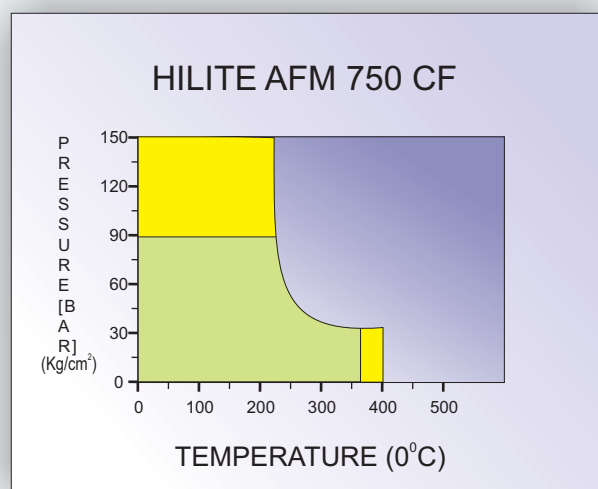

All data quoted above are based on years of experience in production & operation of sealing elements, in view of the wide variety of possible installation & operating conditions one can not draw final conclusion in all application cases regarding the behaviour in gasket joint. The data may not therefore, be used to support any warranty claims.
Should you have any doubts about the choice of gasket material, please refer to us. Our engineering cell will be happy to assist you.

HILITE Industries Pvt. Ltd

B-1, Site No.1 B.S. Road Industrial Area, Ghaziabad-201001 (U.P.) INDIA
Phone : 0091-120-4144500, 2700879 Fax : 0091-0120-2703385 email : hi-lite@vsnl.net Website www.hilite.co.in